

## BSP >> Battery Status Processor


Our new BSP displays with great precision the state of charge of the battery in your Xtender system!

### Specific features of BSP:

- Highly performing algorithm and very precise measuring.
- Graphically displayed state of charge history.
- Deals with battery nominal voltages from 12 to 48Vdc.
- Shunt for the current measuring included.
- Display, data logging and configuration via the RCC-02/-03.

### Range and listprices:

- BSP 500 (shunt 500 A), **CHF 359.-**
- BSP 1200 (shunt 1200 A), **CHF 389.-**

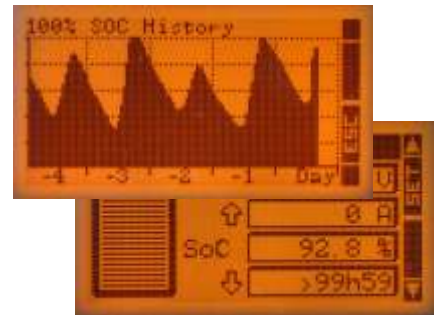

Availability: January 2011

## Xcom-232i >> Communication module RS-232

This module is equipped with a serial port for the communication with an Xtender system via an RS-232 interface.

The Xcom-232i is replacing the optional RS 232 port offered with the RCC-02/-03-32. More information soon on our website: [www.studer-innotec.com](http://www.studer-innotec.com)

### Listprice:

- Xcom-232i, **CHF 226.-**

Availability: February 2011

## Pricelist 2011

You will find the new pricelist here attached.

*Studer Innotec SA wishes you  
a great Year 2011!*



### Studer Innotec SA

Rue des Casernes 57  
1950 Sion / Switzerland  
Tel : +41 (0)27 205 60 80  
Fax : +41 (0)27 205 60 88  
Email : [info@studer-innotec.com](mailto:info@studer-innotec.com)  
Web : [www.studer-innotec.com](http://www.studer-innotec.com)

