


TPS105S

10W
Mono Crystalline Solar Module



Not Your Average Solar Provider

Our Products Categories

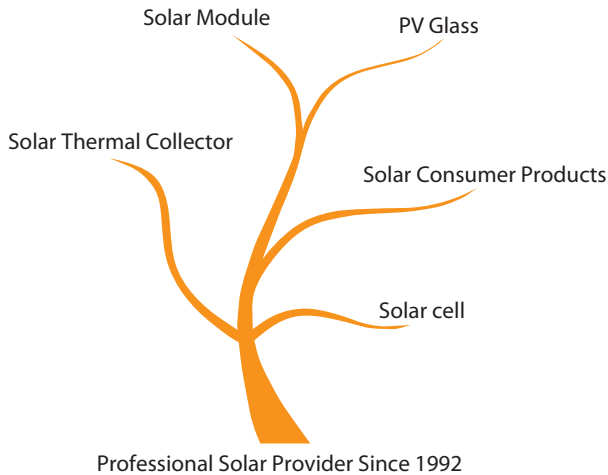

Key Feature



Plus power tolerance: 0~3%



Independent research anti-reflective and self-cleaning glass surface reduces power loss from dirt and dust




Excellent performance under low light environments, create better kWh/kW ratio and produce average 2-3% more electricity

Best Quality

- Junction box and bypass diodes guarantee the modules free of overheating and "hot spot effect"
- 100%EL double-inspection ensures modules are defects free

Electrical Characteristics

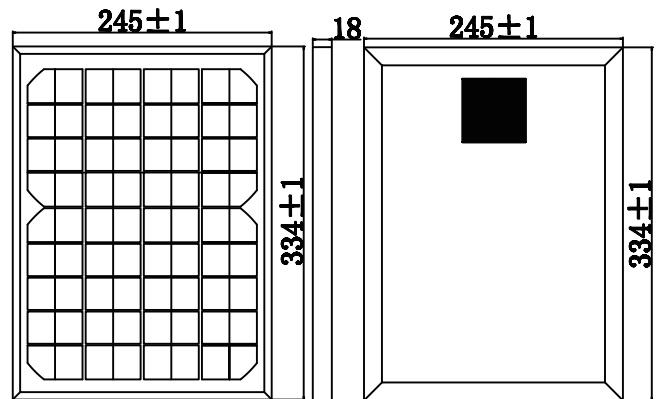

MECHANICAL SPECIFICATION

Cell Type	Mono crystalline 156×156mm
Dimensions(A×B×C)	334×245×18mm
Front Glass	3.2mm Low iron tempered glass
Frame	Anodized aluminum alloy
	N/A
Output Cables	N/A

PERFORMANCE AT STANDARD TEST CONDITION (STC:1000W/m²,25°C,AM1.5)

Module Series	TPS-105S-10W Mono
Maximum Power at STC(Pmax)	10W
Short Circuit Current(Isc)	0.66A
Open Circuit Voltage(Voc)	21V
Maximum Power Current(Imp)	0.60A
Maximum Power Voltage(Vmp)	16.8V

ABSOLUTE MAXIMUM LIMITS

Parameters	Unit	Rating
Operation temperature	°C	-40 to +85
Storage temperature	°C	-40 to +85

DEALER INFORMATION BOX